



Cable Management

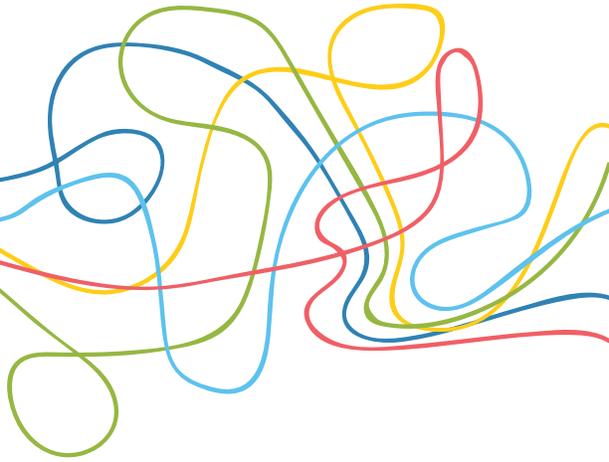


Tools Needed: Small Phillips Screwdriver

Cables, cables everywhere; what's the best way to connect them and keep a clean look? Most customers with an over the counter configuration use this type of setup.

- Identify the center hole on the stand. (Where the tablet pivots) You will want to run the cables through this slot.
- Start by making sure that the panels in the back are unscrewed using a philips screwdriver.
- Run the power cable.
- Run the printer cord through the center hole and connect it to the USB slot on the side nearest where you will have the printer.
- Run the scanner cable.
- Determine where you want to place the MSR. The three most popular places are in front of the tablet station directly on the cash drawer, to one side of the stand directly on the cash drawer, or on the side of the stand on the side of the cash drawer.

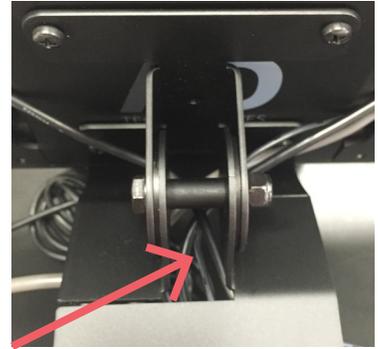

Cable Hole in Stand

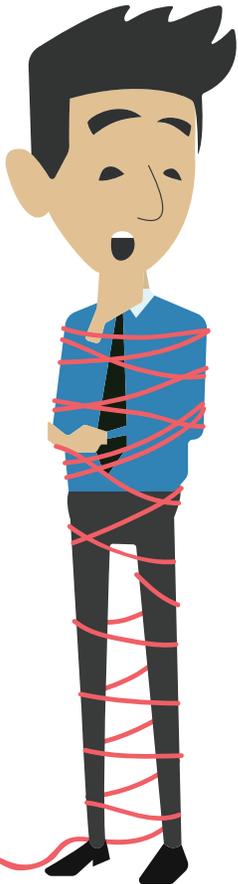

Side MSR



Front MSR

- Run the cables through the center (or the front slot on the stand if you want to use the front of the stand placement).
- Use the ZOTs (adhesive dots) or Velcro to secure the card reader where you want it located.

Connect peripherals:

- Cash Drawer Cable to Printer
- Connect Proport Power cable
- Printer cable (USB) to Proport
- Scanner cable (USB) to Proport
- MSR cable (USB) to Proport